


PRO GROW

EVO

2.8 μmol/J

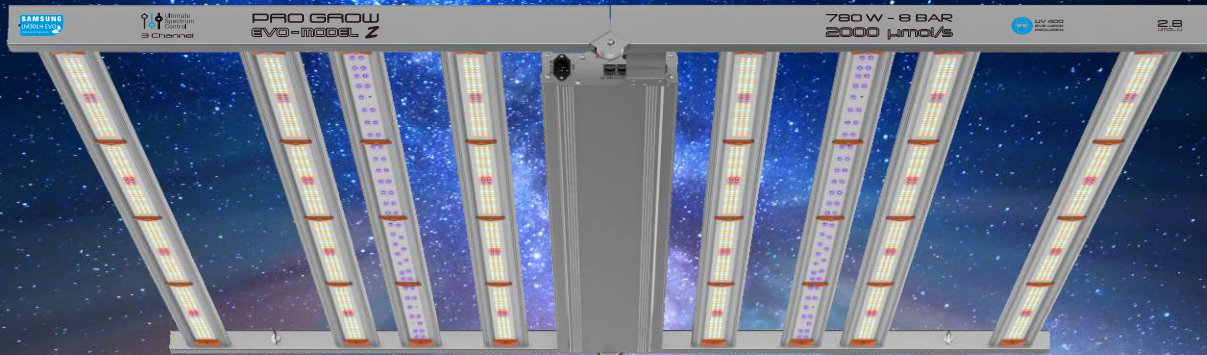

780 W 2000 μmol/s



ADJUSTABLE 3 CHANNEL LED




Now With
Plant-centric Spectrum




EVO - MODEL Z

At its core is the addition of the new Samsung LM301H EVO 4000 K diode. The EVO diode shifts the previous blue peak from 450 nm to 437 nm. Plants grown under this plant-centric spectrum have bigger and thicker leaves and higher levels of nutrients.


Growth

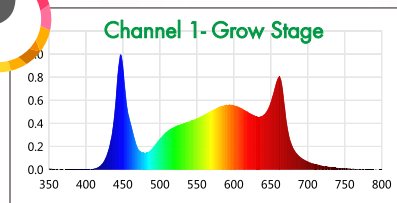

Early Bloom

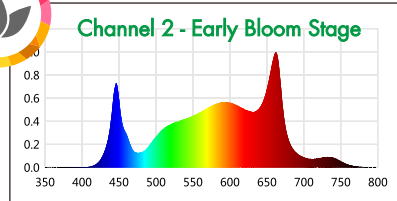

Late Bloom

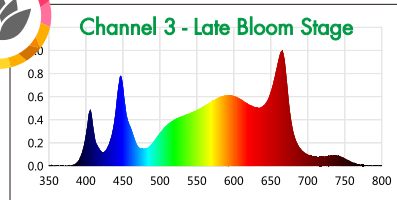

Increased Blue

New EVO 4000 K diodes give plants a 'photon pump' resulting in up to 5% increased yields with no extra power usage. Deep blue targets peak chlorophyll & photosynthesis production for boosted vegetative growth & vigor.

Increased Red & Far-red

Higher Red and Far-red output for increased production in flowering plants. The right amount of Far-red light engages Emerson Effect, encourages early node staging and more flower sites.

Increased Red, Far-red + UV
UV & Red & Far-red offers maximum BPF (ePar). This encourages lateral branching, less stretching, enhanced lower size and improves essential oils, taste and aroma.



SAMSUNG
LM301H

OSRAM
HYPER RED

OPTIMUM
DIODES



3 CHANNEL SPECTRUM TUNING



Take your crop to the next level with the PRO GROW EVO 780 W Model Z. Three separate light channels for grow, early bloom and late bloom deliver the best possible spectrum at the three most influential stages of a plants life. The addition of EVO 4000 K White, Blue, UVA, UVB and Far-red diodes result in boosted plant growth, more flower sites, increased flower density, higher crop yield & improved essential oils, taste and aroma.


- BPF (ePar) > 2000 $\mu\text{mol/s}$
- PPF - 1900 $\mu\text{mol/s}$
- Efficacy - 2.82 $\mu\text{mol/J}$
- Optimum 0-10 V Driver
- 2510 SMD LED Diodes
- CRI 91 - Full Spectrum Array
- Dimmable to 40%, 60% or 80%

SPECTRUM AND ePAR - PUSH PAST PAR



ePAR redefines the PAR spectrum to recognise the benefits of light waves outside of the 400 to 700 nm range. PRO GROW EVO 780 W Model Z includes 310 nm UVB, 395 nm UVA and 730 nm Far-red diodes. The additional diodes extend the spectral gap from 380 nm to 770 nm. This was previously only provided by a combination of HPS, MH & CMH lights but is now available from a single LED fixture.

EXTENDED PAR SPECTRUM GRAPH (ePAR)

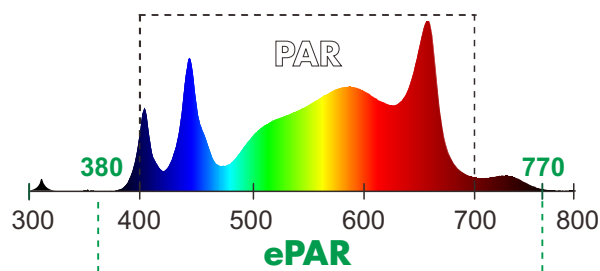

USE WITH SMART TOUCHSCREEN CONTROLLER




The PRO GROW EVO LED 780 W Model Z is compatible with the PRO GROW Smart Touchscreen Controller. Equipped with an RJ14 Cable, up to 160 fixtures can be daisy chained from the one controller. Simply switch all fixtures to EXT mode to begin controlled operation.



SMART TOUCHSCREEN CONTROLLER COMPATIBLE

(sold separately)

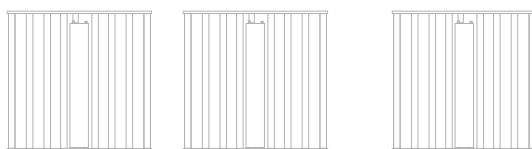


SINGLE CHANNEL.
UP TO 160 FIXTURES

FOLDABLE DESIGN




Simply unfold, plug and play with the PRO GROW EVO 780 W Model Z. Four quality rope ratchets are included for immediate installation.




SPECTRUM TEST REPORT - 4 Channels


Channel 1- Grow Stage

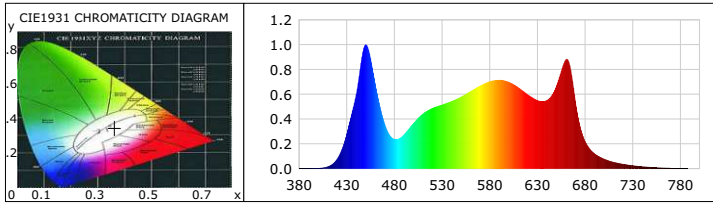


Channel 2- Early Bloom

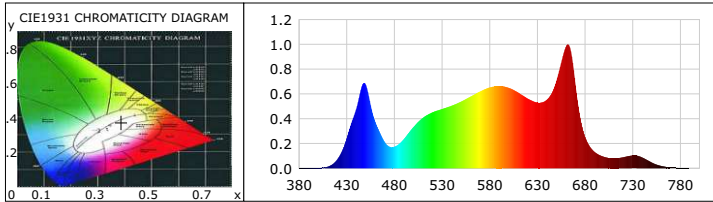


Channel 3- Late Bloom

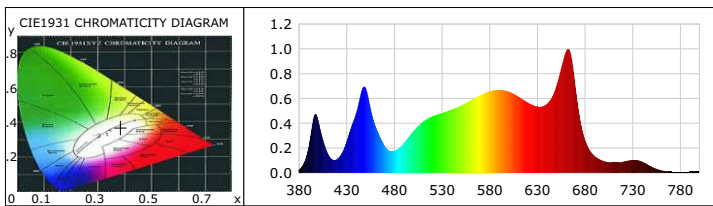

Channel 4- UVA & UVB

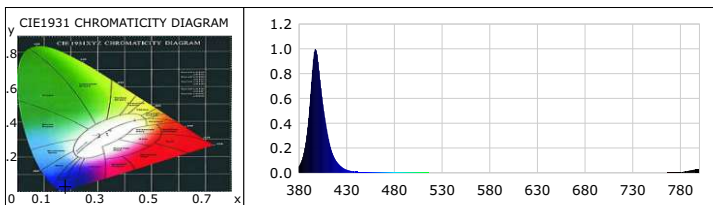

For a full light source test report scan the QR code or visit our web site @ www.progrow.net.au




MANUAL CHANNEL OPERATION

Control Channels Via The Fixture:

Blue/red exchange button.
Swap from channel 1 to channel 2 & 3

UVA/UVB button.
Engage for channel 3

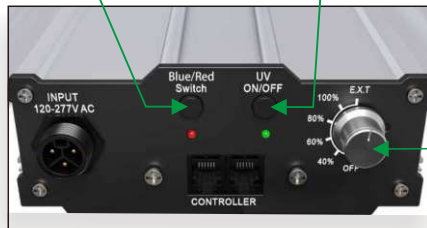

Manual dimming switch.
Switch to EXT when using the Z - Smart Controller



CAUTION: UV light is barely visible. Always wear UV 400 eye protection when UVA/UVB (channel 3) is in operation.

PAR DISTRIBUTION (with red, Far-red & UV)

Mounting Height: 12 (30CM)

271	448	511	507	447	273
548	992	1085	1082	983	549
703	1246	1365	1359	1227	705
726	1281	1411	1398	1263	726
596	1053	1165	1147	1030	586
276	449	507	502	456	270

Mounting Height: 24 (60CM)

290	393	459	459	393	292
418	595	687	684	599	420
514	727	841	833	724	519
517	732	844	841	732	520
430	590	698	698	601	429
290	393	453	451	399	291

Mounting Height: 36 (90CM)

256	315	361	360	320	262
322	409	463	465	419	328
370	473	533	533	476	380
370	471	534	534	478	380
326	410	464	466	413	331
256	314	353	352	319	257


Mounting Height: 48 (120CM)

214	248	373	373	251	218
247	293	321	322	298	251
271	322	353	353	325	277
270	322	353	353	325	277
246	290	317	321	295	252
211	244	266	266	248	212

SPECIFICATIONS

Model:	780 W Model E 8 Bar
Light Source:	2510 x Single Mount Diode/LED's
Input Voltage:	120 V-277 V AC
Frequency Range:	50~60 Hz
Power/Watts:	780 W
Net Weight:	13.7 kg
Light Beam Angle:	120 Degree
Body Case Material:	Die Cast/Pressed Aluminum
IP Grade:	IP55 (water resistant)
Size:	L-1105 mm x W-1067 mm x H-54 mm
Lifespan:	>50,000 Hours
Min Operating Temp:	-25°C
Max Operating Temp:	40°C
Warranty:	3 Year Warranty

DIMENSIONS

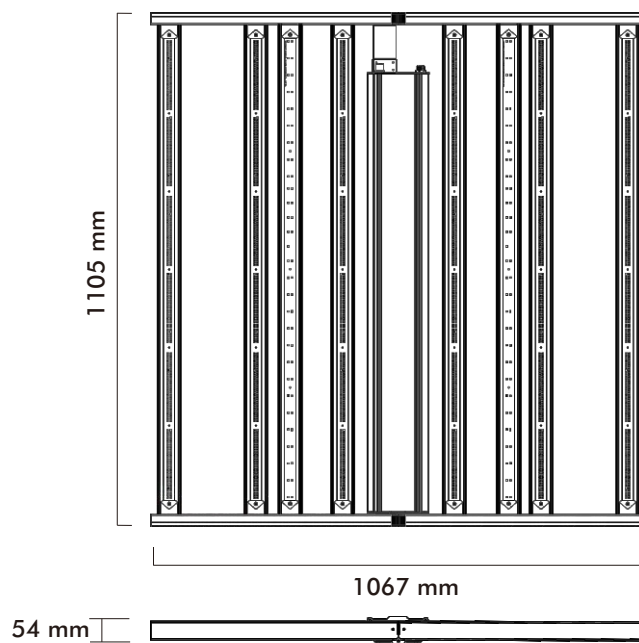


VOLTAGE

VOLTAGE	240 V
AMPERAGE	3.25 A

PRO GROW
LED - MODEL Z

780 W - 8 BAR
2000 μ mol/s

MAXIMUM RECOMMENDED LIGHT COVERAGE

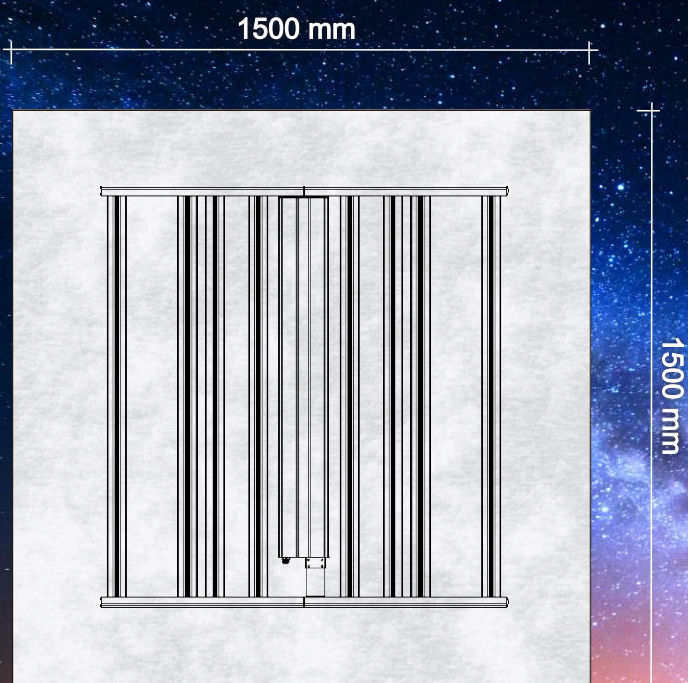

SCAN FOR MORE INFO



www.progrow.net.au



SAMSUNG
LM301H

OSRAM
HYPER RED

OPTIMUM
DIODES

WHG
Wholesale Horticultural Group